AKH-0.66 K-Φ16 Split type current transformer V1.0

1. Product Feature

The product is easy to install and connect and is mainly used for power operation, maintenance, and transformation project, with small-volume, high-precision, strong load capacity, easy installation, and other advantages that can be used with AMC16 multi-loop monitoring instrument.


2. Model Description

AKH - 0.66 K - □ - □

- Output type
- Specification
- Open type
- Rated voltage
- Enterprise model

U:mV Output;
M:mA Outout;

3. Pecifications and Dimensions

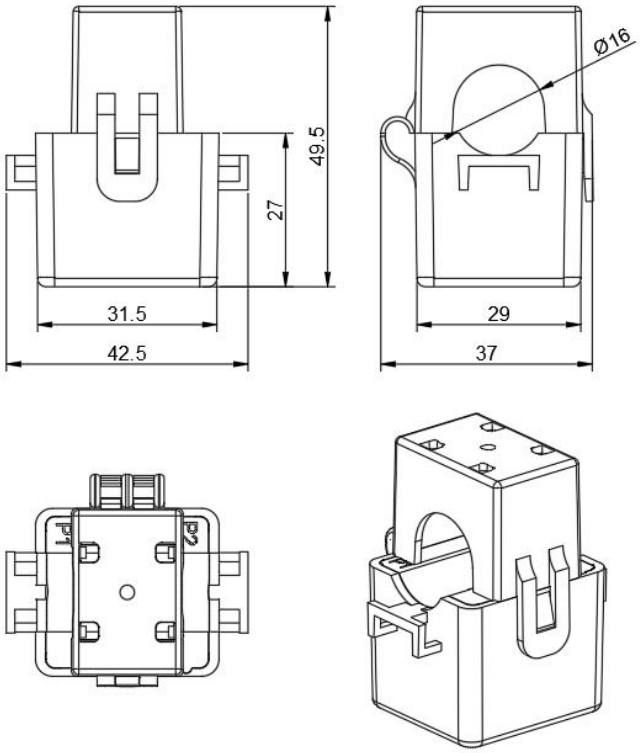

Note: The secondary signal output line is black and white twisted pair, white is S1, black is S2, and the line length is 2m ± 10cm.

Acrel Co.,Ltd

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

4.Cross-reference tables of spec.-parameter




Type	Input	Output	Accuracy Class (Ω)	Hole size (mm)
			0.5	
K-Φ16-M	(20-120)A	(10-50)mA	10Ω	Φ16
K-Φ16-U		(100-333)mV	10Ω	

5.Technical indicators

- Rated operating voltage: AC0.66kV
- Frequency: 50-60Hz
- Environment: -30℃~+70℃
- Altitude: ≤3000m
- Power frequency withstand voltage: 3000V/1min 50Hz
- Used in places without direct rain or snow, serious pollution and violent vibration

6. Installation

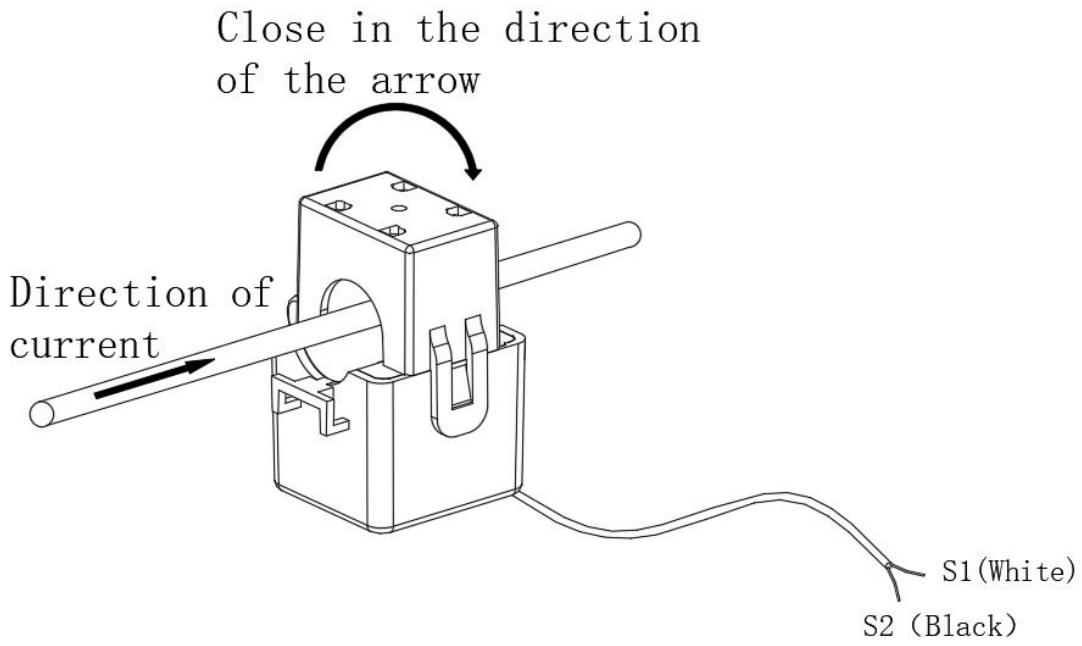

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000