ARTM-8 Multi Channel Temperature Controller



Functions


Functions	ARTM-8
Channels	8
Inputs	Thermal resistance: Pt100
Accuracy	0.5s
Alarm	2 groups normally open,Capacity AC250V/5A,DC30V/5A
Auxiliary Power Supply	ARTM-8
Auxiliary power supply	AC85~265V，DC 100~350V
Poewe consumption	≤2W
Communication	ARTM-8
Protocol	MODBUS-RTU
Rear port	RS485
Baud rate(bps)	1200,2400,4800,9600,19200
Environment	ARTM-8
Isolation	2kV/1min Ac effective value
Temperature	Operating: -10～+55℃, Storage: -25～+70℃
Humidity	≤95%, （No condensation）
Altitude	≤2000m

Model Description


ARTM - □

- Sensor numbers 8
- Temperature measuring equipment


Wiring

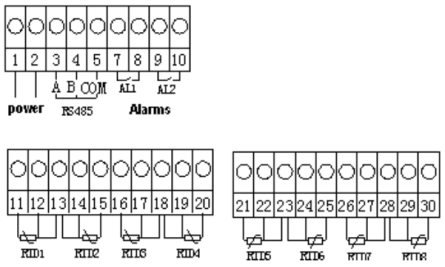


Operation Process

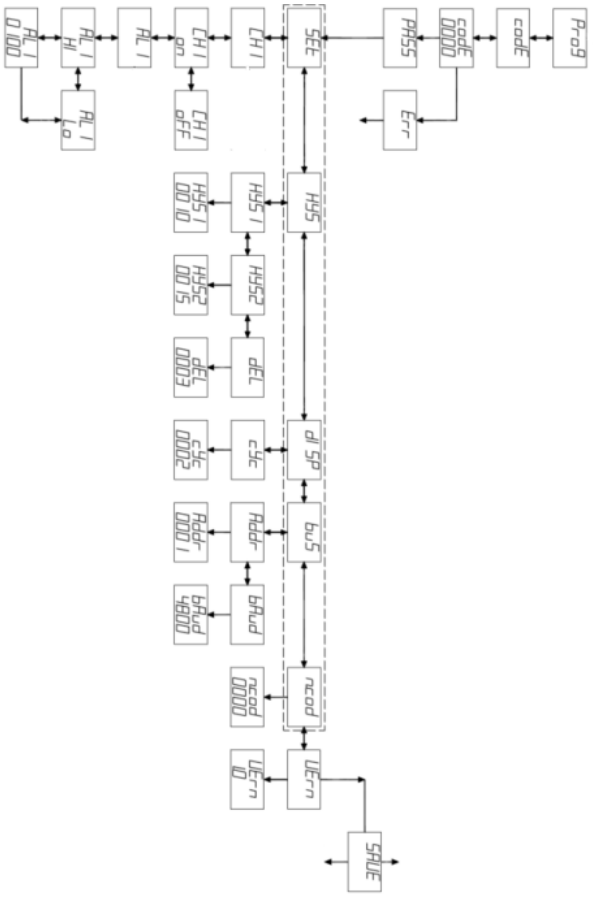

Dimensions



Dimensions

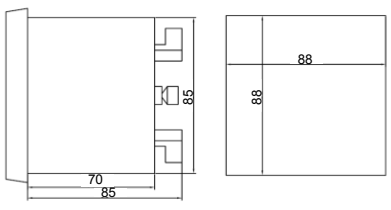

Cut-out Dimensions