Author: Loki Elfin
E-mail: loki@acrel.cn
Website: www.acrel-electric.fr

0. Scenario Preset

(1) There are 10 Area which are far from each other or are hard for RS485 wiring.

(2) Each Area has 1 load 3-phase powered by 1 circuit 3-phase that needed to be monitored.

(3) Each circuit are with rated voltage of 400Vac L-L&230Vac L-N, and with rated current of 150A AC.

(4) Circuits' current are carried by cable, of which the size was suitatble for φ24mm aperture. (diameter)


(5) For each monitoring circuit, we will install 1* ADW300-4GHW/C Wireless 4G 3-phase Energy Meter paired with 3* AKH-0.66/K K-φ24 150/5 for current input.

1. Devices Deployment Plan

Area #1 - Load #1:
- 1* ADW300-4GHW/C Wireless 4G Energy Meter
- 3* AKH-0.66/K K-φ24 150/5 Split-core Current Transformer

.
.

Area #10 - Load #10:
- 1* ADW300-4GHW/C Wireless 4G Energy Meter
- 3* AKH-0.66/K K-φ24 150/5 Split-core Current Transformer

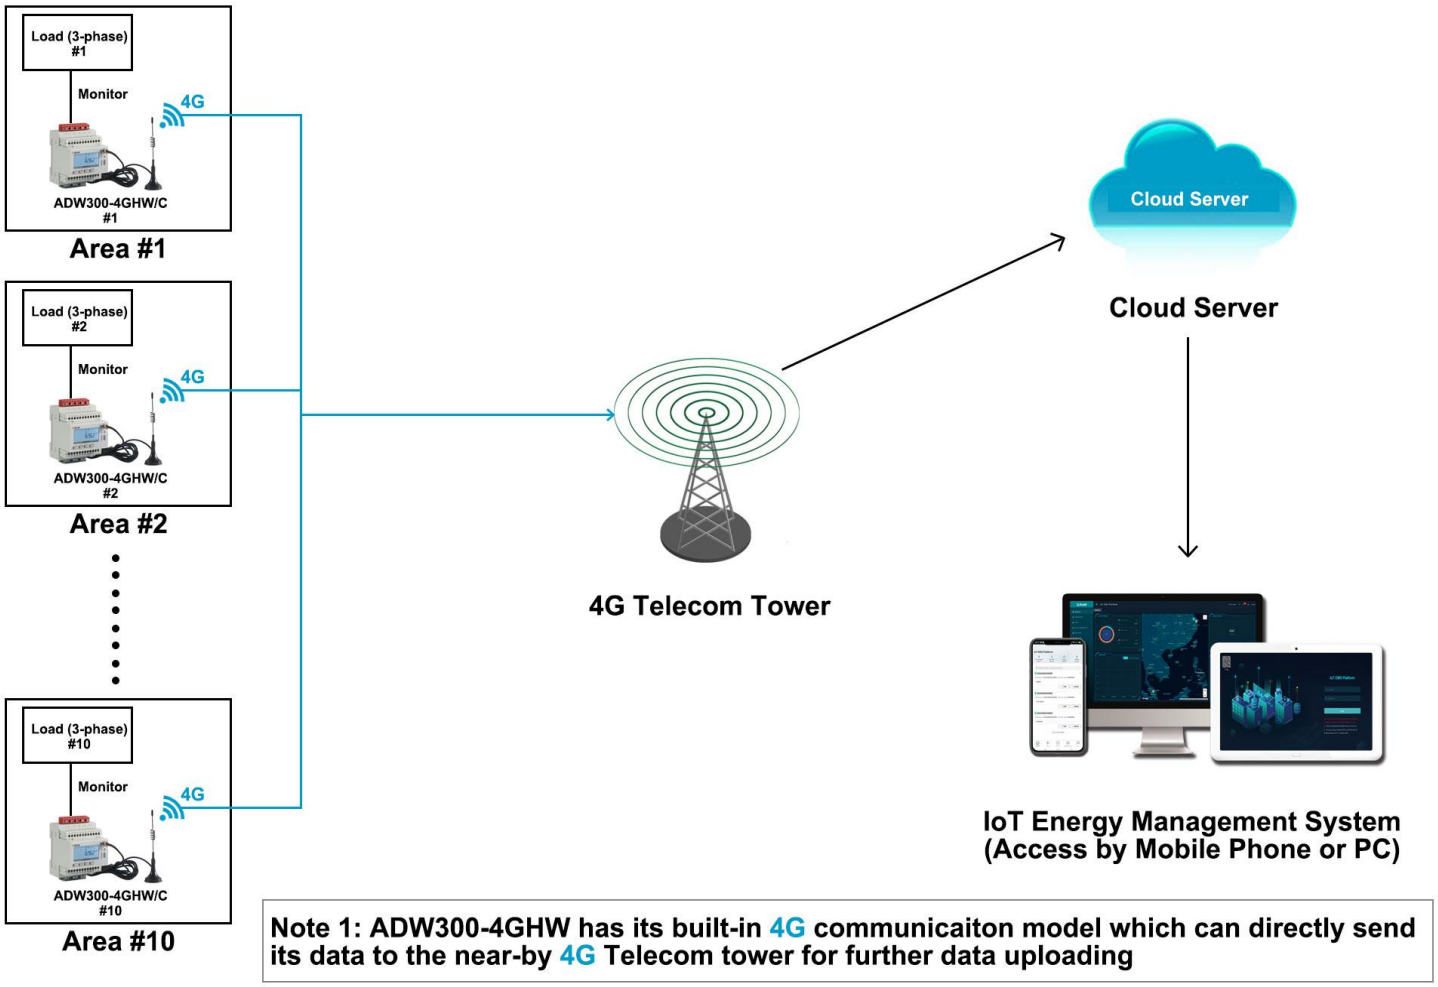

Note 1: ADW300-4GHW has its built-in 4G communicaiton model which can directly send its data to the near-by 4G Telecom tower for further data uploading

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Author: Loki Elfin
E-mail: loki@acrel.cn
Website: www.acrel-electric.fr


2. Communication Structure&Logic

(1) 4G Communication could be served as one of the final data upstream methods by sending the data to cloud server deployed in Internet so that Acrel IoT System could be interact with these data collected by bottom metering devices like Energy Meter

(2) ADW300-4GHW/C Wireless 4G 3-phase Energy Meter has a built-in 4G communication module which allow it to directly send data to local 4G telecom tower through 4G signal based on MQTT and MODBUS-TCP protocol without using a extra 4G IoT Gateway.

(3) Each ADW300-4GHW/C has a 4G card tray for installing the 4G sim card which could be bought from your local 4G service provider.

(4) ADW300-4GHW/C also have a RS485 communication normally used for devices adjustment with Acrel ADW300 adjustment softare.

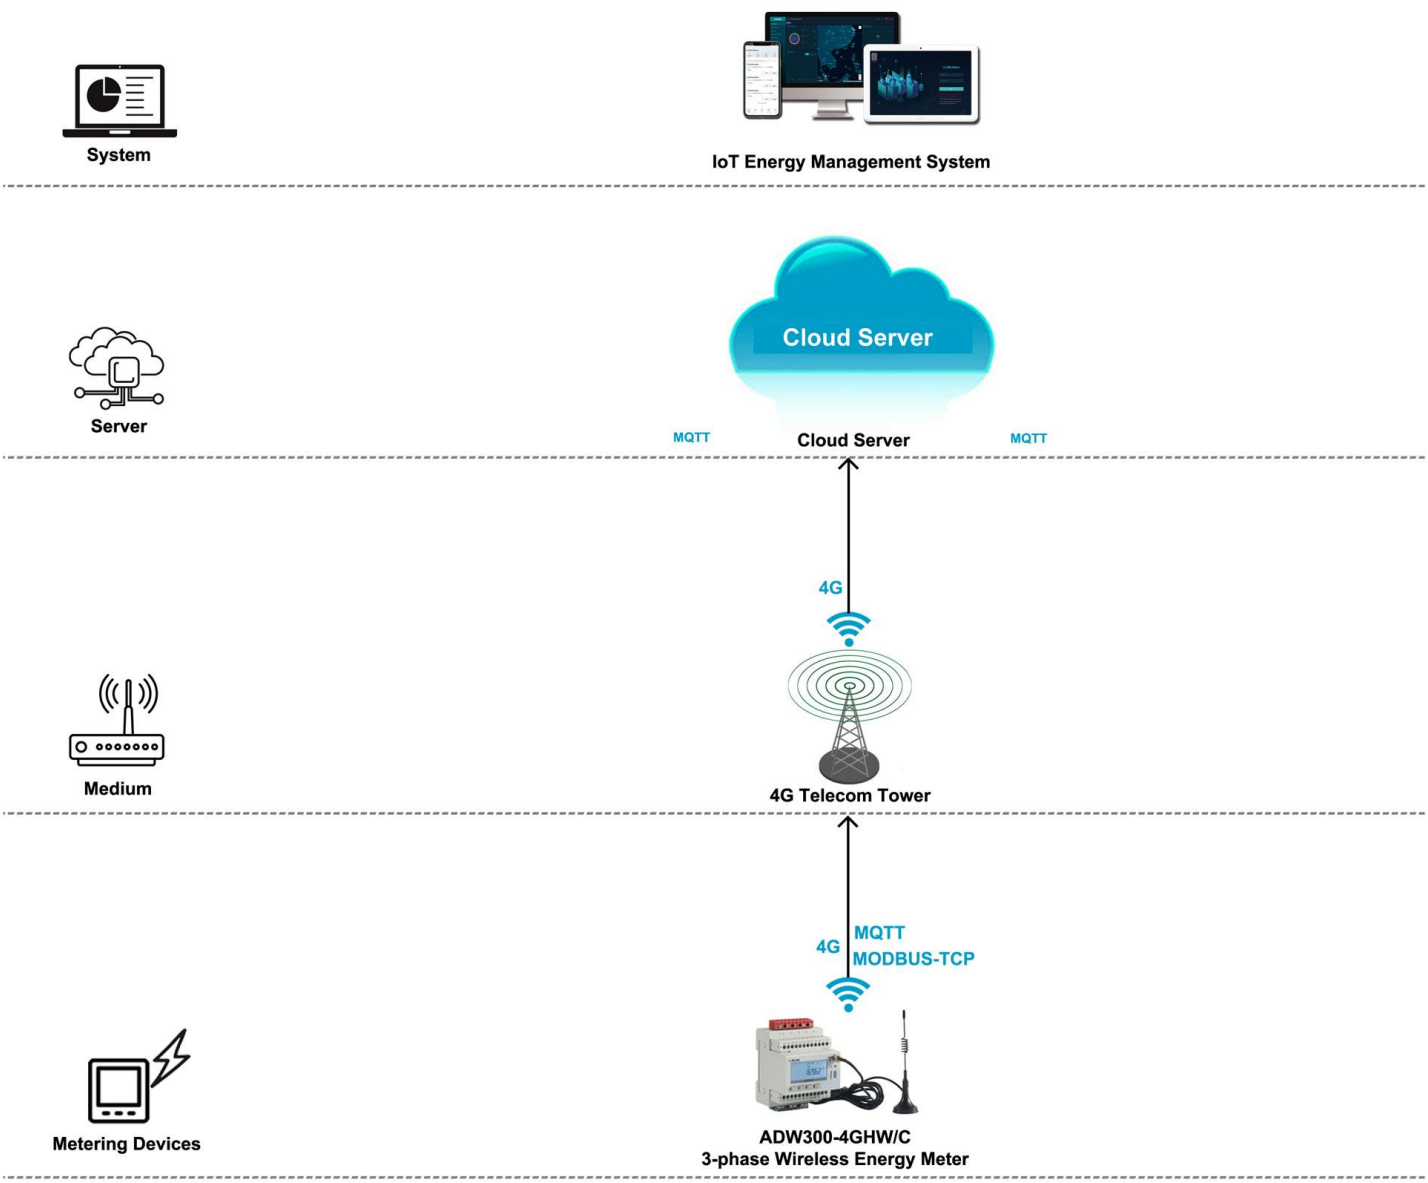

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Author: Loki Elfin
E-mail: loki@acrel.cn
Website: www.acrel-electric.fr

3. Hardware Devices Overview [Energy Meter & Paired CTs]

Model 1: ADW300-4GHW/C 4G 3-phase IoT Energy Meter

3-phase | Multi-Function | IoT APP/WEB | 4G/WiFi/LoRa



- Monitoring: Up to 1 circuits 3-phase [AC Metering]
- Wireless Comms.: 4G LTE [MQTT, MODBUS Protocol]
- Wired Comms.: RS485 [MODBUS-RTU Protocol]
- Rated Current: 3x1(6)A AC [via -/5A CTs.]
- Rated Voltage: Up to 3x660Vac L-L
- Certificate&Standard: CE, CE-RED
- More Introduction: https://www.acrel-electric.fr/product/adw300_iot_wireless_smart_energy_meter

Model 2: AKH-0.66/K K-Φ24 150/5 Split-core Current Transformer

AC | 60~400A | Split Core | Class 0.5



- Current Ratio: 150A/5A
- Primary Current: 150A
- Secondary Current: 5A
- Accuracy: Class 0.5 or 1.0
- Certificate&Standard: CE
- More Introduction: https://www.acrel-electric.fr/product/split_core_current_transformer_akh_0_66_k_24

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Author: Loki Elfin
E-mail: loki@acrel.cn
Website: www.acrel-electric.fr

4. Overall Model Selection&Quoation

(1) This Quotation doesn't include freight charge. To gain a complete quotation, please refer the actual quantity that you want to request for the actual order, once we receiving it. We will issue a Official Proforma Invoice with Acrel Stamps on it for later procedure.

System Software

Name	Description	System Price	Remark (Choose Host Service or Buy-out Service after 3-month Free Trial of **Cloud IoT System**)
 **Acrel Cloud IoT Energy Management System**	1.System support all the meters across the country whose data has been sent to cloud server through **4G,WiFi or Ethernet**. 2.Remote meter reading and data collection. 3.Provide **IoT APP** for **mobile phone** side and **IoT WEB** for **PC** side. 4.Generate energy data report of daily, monthly and annually period with year-on-yeay and period-on-period energy analysis. 5.Provide various alarm function to ensure a stable operation of the system and protect your property. 6.Offer 3-month free trial of system with full technical support as for a test phase or pilot project.	$0 (recommended in pilot projtect)	3-month Free Trail (Users don't need to rent a cloud server))
		$xx/Year (For 10 Points) (Price for Host Service Only, recommended in pilot projtect)	$xx to buy Hosting Service for 1 monitoring points connected to the system 1 year (Users don't need to rent a cloud server)
		$xxxx/Permanent (Limitless Points) (Price for Buy-out Service Only,recommended in late projtect)	1-time charging of $xxxx for Buy-out Service of permanent use (A cloud server need to be rent by users)

Cloud Server

Name	Description	Server Renting Price (For Reference Only)	Remark
 Cloud Server	1.Cloud Server could be rent on the cloud server provider like Amazon Cloud. 2.Users of **Cloud IoT Energy Management System** only need to rent cloud server when they choose **buy-out** service of our **Cloud IoT System**. And if they are using **hosting service** or **3-month free trial** of our Cloud IoT System, we will use our own cloud server which has been rent on Amazon so that users don't need to rent a cloud server. 3.The quotation of Cloud Server is only a reference price that we have rent on Amazon Cloud.	According to Specs of Rented Cloud Server	Below cloud server specs could support 1000~2000 monitoings points connected to the system (Server：8 core 16G Operation System：windows server 2016)

4G Wireless Energy Meter

Overview Picture	USAGE&MODULE NAME	DESCRIPTION & SPECIFICATION	QUANTITY	FOB UNIT PRICE (USD)	AMOUNT (USD)
	3-phase 4G Wireless Energy Meter **ADW300-4GHW/C**	**Communication:** 4G Wireless Communication (with 4G SIM card)&RS485 (MODBUS-RTU) **Rated Voltage:** 3x380~456Vac L-L or 3x660Vac L-L (45~65Hz) **Rated Current:** 3x1(6)A AC (via CTs) **Auxiliary Power Supply:** 85~265Vac	10pcs	/	/

Paired Split-core CT

Overview Picture	USAGE&MODULE NAME	DESCRIPTION & SPECIFICATION	QUANTITY	FOB UNIT PRICE (USD)	AMOUNT (USD)
	Split-core Current Trasnformer **AKH-0.66/K K-φ24**	**Current Ratio:** 150A/5A AC **Aperture:** φ24mm (diameter) **Accuracy:** Class 1.0	30pcs	/	/

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Author: Loki Elfin
E-mail: loki@acrel.cn
Website: www.acrel-electric.fr

6. Acrel IoT Energy Monitoring System (Partail Introduction)

Acrel IoT Energy Monitoring System could be access in 2 different ways:

(1) Access through WEB on your computer.

Access port: https://iot.acrel-eem.com/

(2) Access through APP on your mobile phone


Download Link: https://play.google.com/store/apps/details?id=com.acrel.iotems

(1) WEB Accesss (Computer):

Access Port: https://iot.acrel-eem.com/

Test Account Name: acrel

Test Account Password: 123456

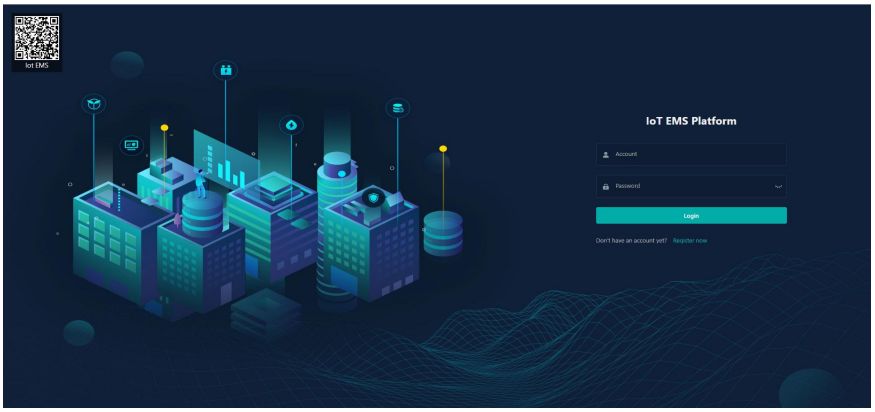


(2) APP Accesss (Mobile):

Download Link: https://play.google.com/store/apps/details?id=com.acrel.iotems

Test Account Name: acrel

Test Account Password: 123456



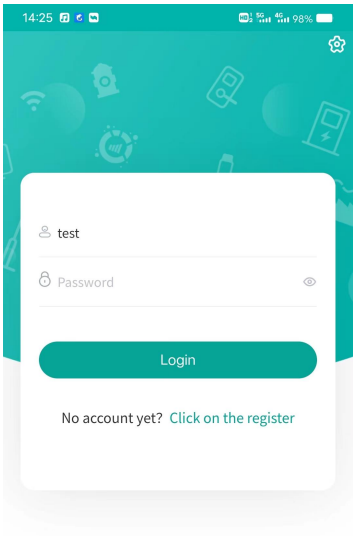

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


Author: Loki Elfin
E-mail: loki@acrel.cn
Website: www.acrel-electric.fr

6. Acrel IoT Energy Monitoring System (Partail Introduction)


Main Function of WEB side System:

(1) Devices List (2) History Curve (3) Electricity Parameters Report (4) Energy Consumption Report (Daily, Monthly, Yearly) (5) User Report


(1) Devices List: Showing the overall devices connected to Acrel System and were bond to certain project. SN code, Online-Offline status, devices model and other necessary information will be shown here.

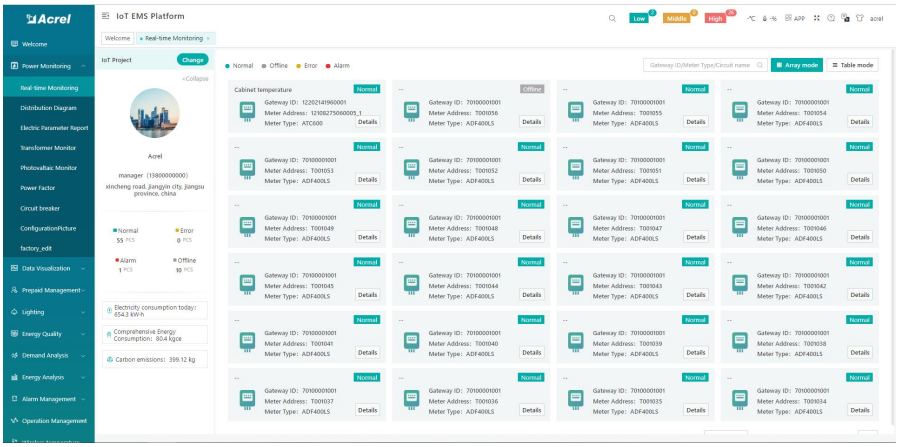

(2) History Curve: Showing the daily history data curve of all the data that could be collected and upload by energy meter or other basic metering devices.

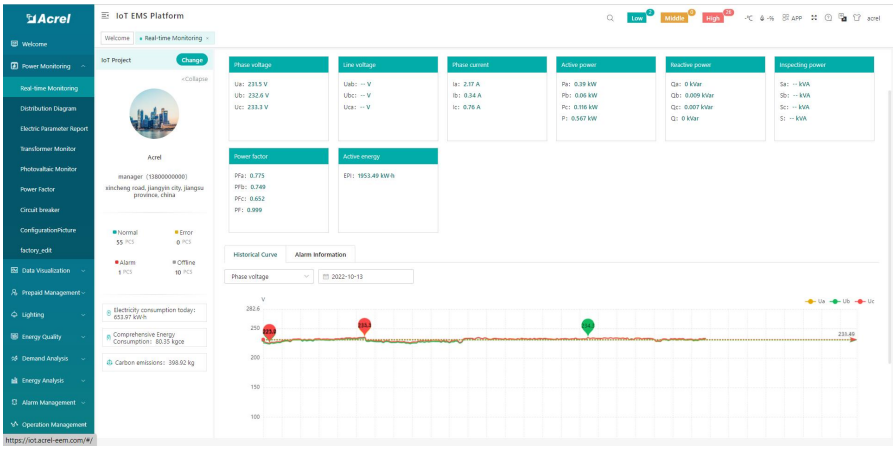

(2) History Curve: By selecting the items of "data" and "electricity parameter", platform can show the history curve of different data and date.

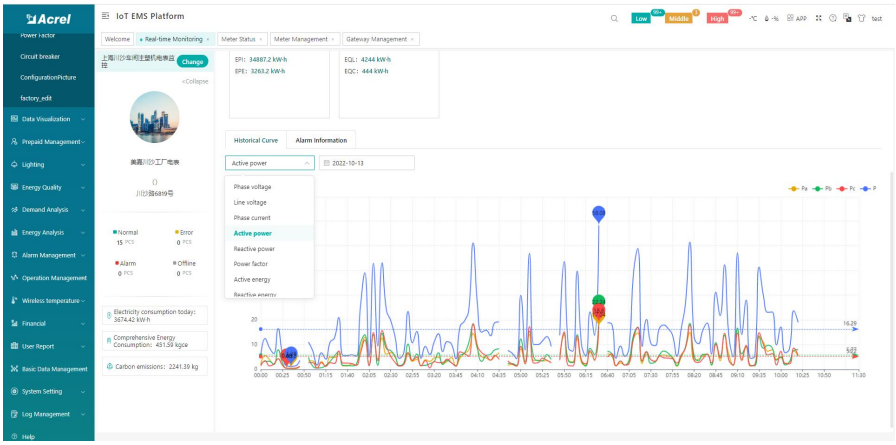

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


Author: Loki Elfin
E-mail: loki@acrel.cn
Website: www.acrel-electric.fr

6. Acrel IoT Energy Monitoring System (Partail Introduction)


Main Function of WEB side System:

(1) Devices List (2) History Curve (3) Electricity Parameters Report (4) Energy Consumption Report (Daily, Monthly, Yearly) (5) User Report


(3) Electricity Parameters Report: Select the "electricity parameters" that you want to show in this report .

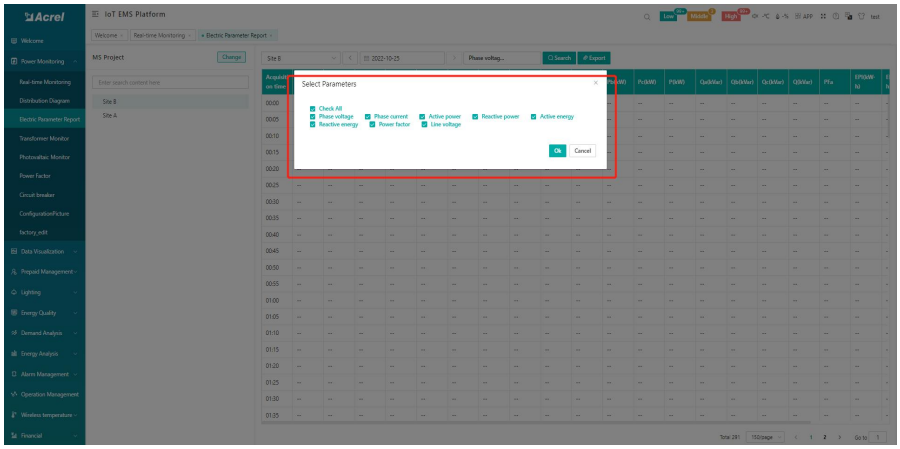

(3) Electricity Parameters Report: All the electricity parameters that could be collected by certain energy meter will showed as a report here.

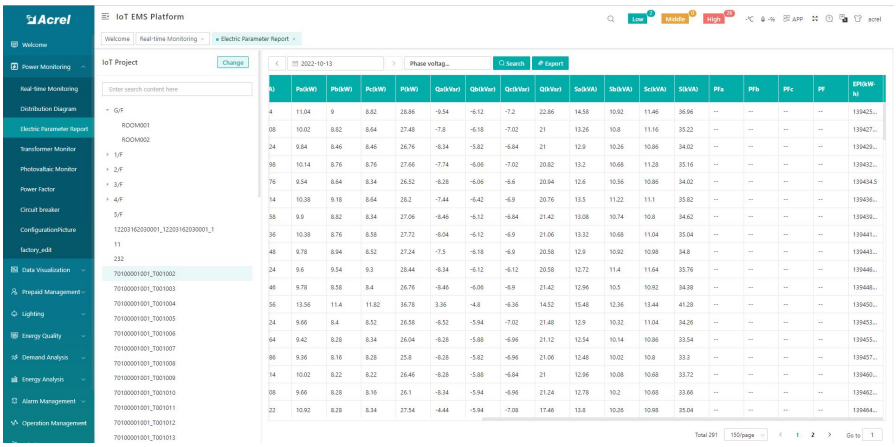

(3) Electricity Parameters Report: Report on platform could be exported in "Excel" format to your computer for a brief storage when accessing the IoT EMS WEB platform.

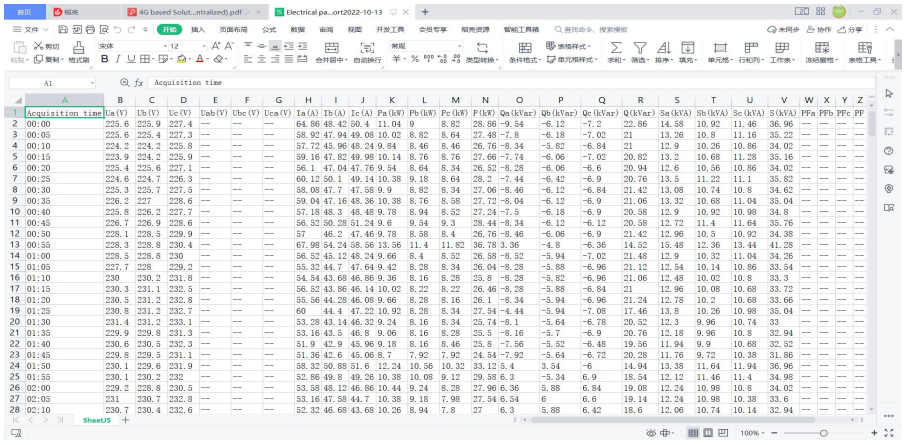

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


Author: Loki Elfin
E-mail: loki@acrel.cn
Website: www.acrel-electric.fr

6. Acrel IoT Energy Monitoring System (Partail Introduction)


Main Function of WEB side System:

(1) Devices List (2) History Curve (3) Electricity Parameters Report (4) Energy Consumption Report (Daily, Monthly, Yearly) (5) User Report


(4) Energy Report (Daily): This Interface show the daily energy consumtion report (calculated by forward active energy)

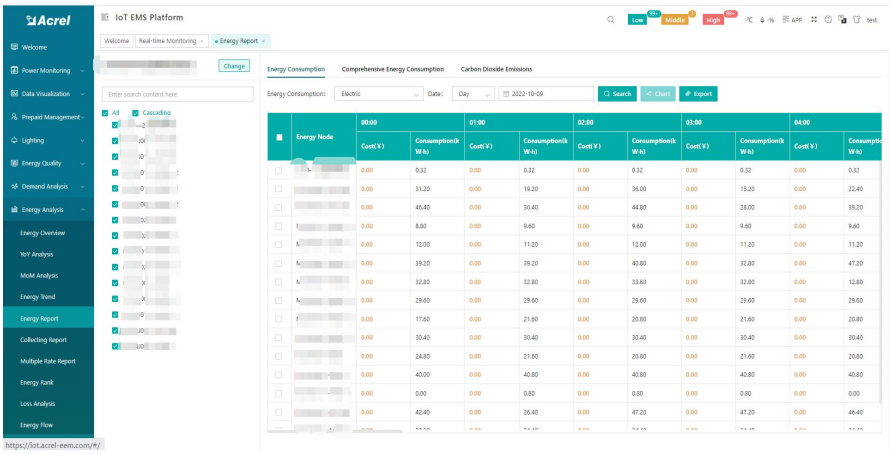

(4) Energy Report (Daily): This daily energy report could be also export to computer in "Excel" format

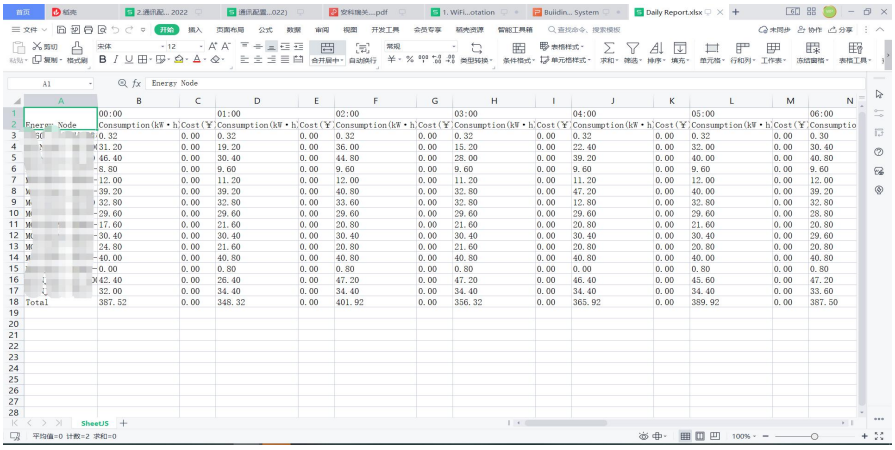

(4) Energy Report (Monthly& Yearly): Same as daily energy report, monthly and yearly energy report could be also checked on platform and exported in "Excel" format.

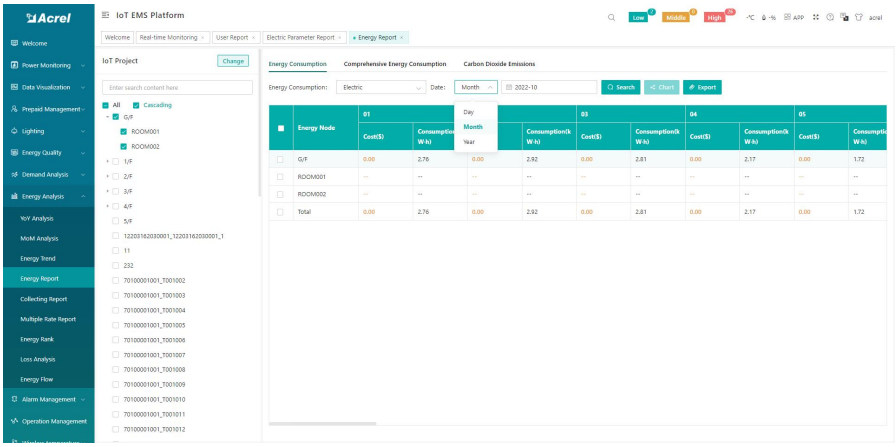

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


Author: Loki Elfin
E-mail: loki@acrel.cn
Website: www.acrel-electric.fr

6. Acrel IoT Energy Monitoring System (Partail Introduction)


Main Function of WEB side System:

(1) Devices List (2) History Curve (3) Electricity Parameters Report (4) Energy Consumption Report (Daily, Monthly, Yearly) (5) User Report


(5) User Report: A comprehensive user report including project overview, energy report, energy analysis and etc could be check on platform

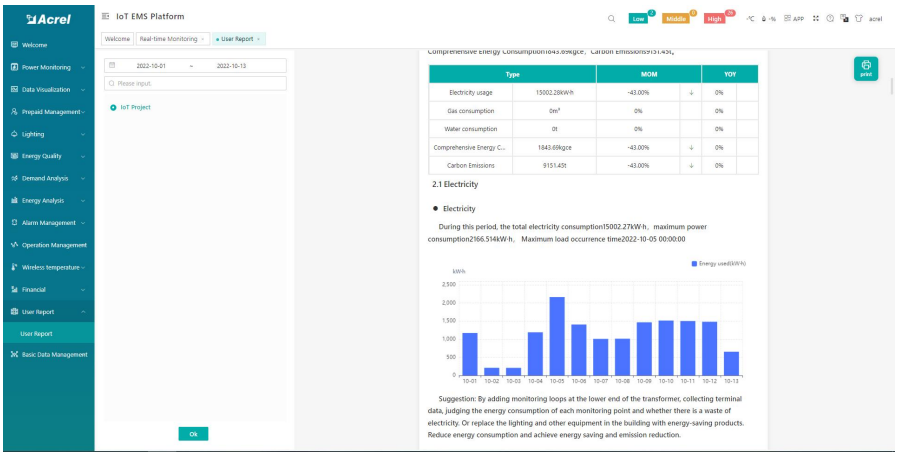

(5) User Report: User report could be exported in "PDF" format into your PC for convenient check and storage.

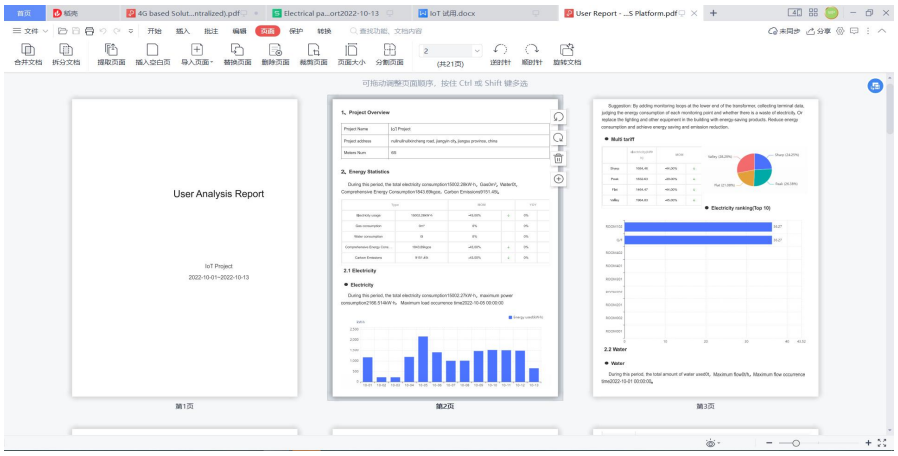

(5) User Report: User report support template customization in buy-out service of Acrel IoT Energy Monitoirng System.

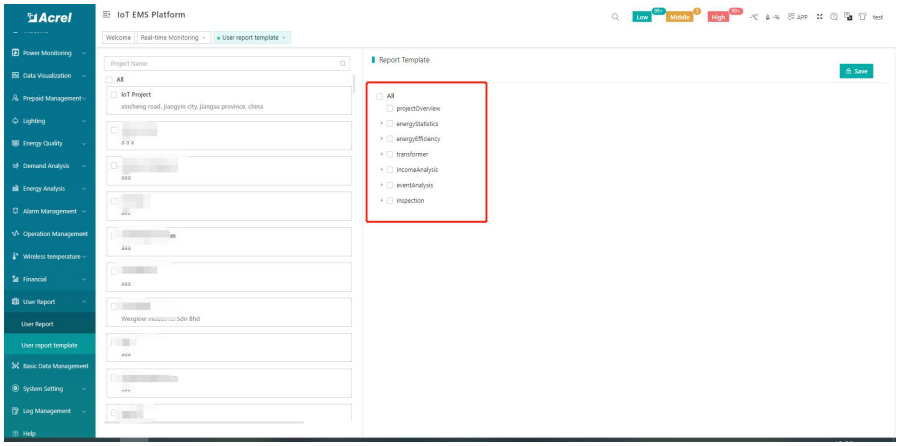

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


Author: Loki Elfin
E-mail: loki@acrel.cn
Website: www.acrel-electric.fr

6. Acrel IoT Energy Monitoring System (Partail Introduction)


Main Function of APP side System:

(1) Devices List (2) History Curve (3) Electricity Parameters Report (4) Energy Trend (5) Energy Consumption Report (Daily, Monthly, Yearly)


Noted: Since APP side and WEB side of Acrel IoT Energy Monitoring System share the same data, normally recommend our user to add the devices to their account using APP and check the data using WEB platform.

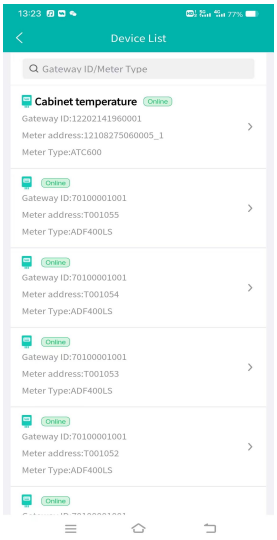


(1) Device List

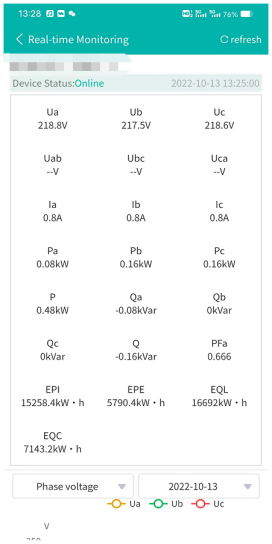


(2) History Curve

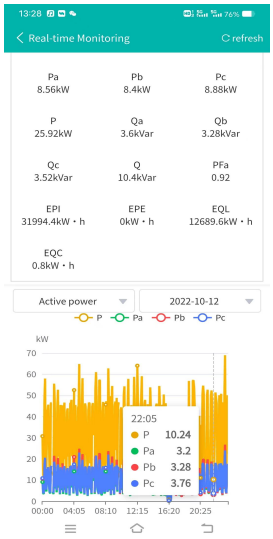

(2) History Curve

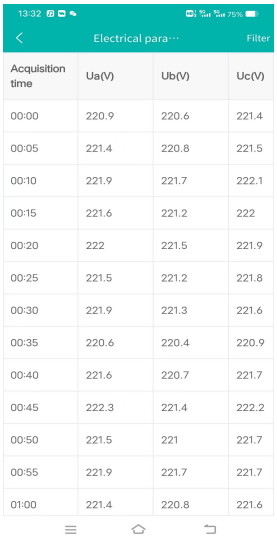

(3) Parameter Report

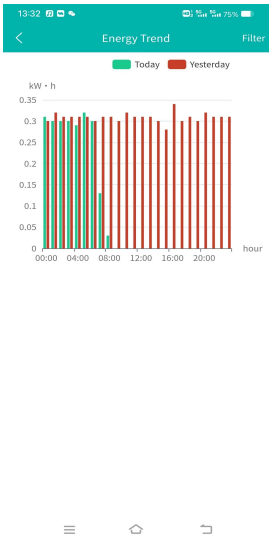

(4) Energy Trend



(5) Energy Report

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000